

# Powered Weigh Table Checkweigher

## Model PW-12

*For Wide Range of Flexible or Rigid Packages and Containers*

The Alpha PW-12 Checkweigher is ideal for accurately weighing packages up to 8 lbs, 14 inches in length, and 8 inches in width. It can operate at speeds of over 200 packages per minute with an accuracy of +/- 0.5 grams. A dust cover is standard on the 8-inch model and is optional on other sizes.

### Specifications

**Package weights:** up to 8 lbs (3.6 kg) per package

**Package sizes:** 14 inches (660 mm) long by 8 inches (203 mm) wide; other sizes available



**Line speeds:** up to 225 packs per minute

**Accuracy:** +/- .250 grams, depending on application

**Weighcell:** precision digital strain gage loadcell



Dimensions

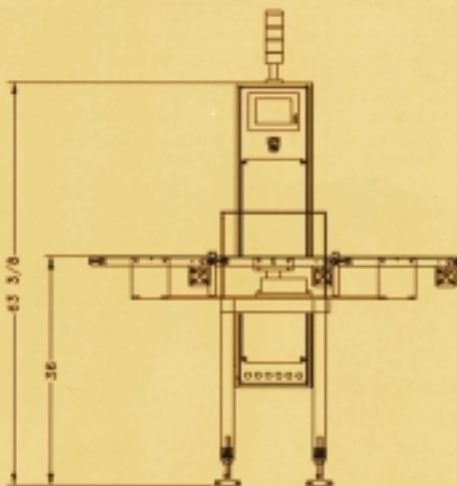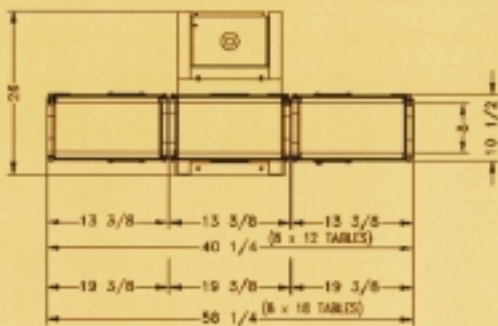

### Options/Accessories

- Weight correction feedback signals to filling equipment can be supplied according to specific formats and types, including digital, raise/lower, or contact closure
- Expanded statistical and report generation options
- Storage of up to 100 programs (storage of 25 is standard)

*Infeed/outfeed system:* freestanding or frame mounted roller, chain, or belt conveyor to move packages onto and away from the checkweigher; length specified by application

*Rejection:* reject mechanism removes over/underweight packages from the line; Air Jet, Swing Gate, Pusher/Bopper, Alarm Horn, Drop Belt, or custom reject configurations; reject device available for mounting on frames, outfeed conveyor, or by customer

\* Specifications subject to change without notice